

FIG. 2.

Experience at a number of Australian loading terminals has provided good information on the limiting wave conditions which cause loading operations to cease. For unloading terminals there is no information available world-wide, but enquiries made of a number of operators and equipment manufacturers suggest the figures in TABLE 1.

TABLE 1

Wave direction relative to ship heading	Limiting Wave Height (metres)	
	Loading	Unloading
0°	2.5	1
45°	1	0.5

There are of course many other factors affecting the limiting conditions for safe operation (e.g. wave period, wind, ship size and inertia characteristics).

A full analysis would include all these factors, but the authors believe that a good first approximation to the berth availability equates with the amount of time each year that the waves fall into the categories shown in TABLE 1.

At offshore loading terminals so far constructed in Australia (1980) sufficient berth availability has been obtained without using a breakwater. Availability is normally required in the range 90-95%, but in some circumstances (e.g. low annual throughput tonnage) much less may be quite satisfactory. In periods of unavailability, the berth is shut down and if there is a ship in port it is taken off and anchored in deep water awaiting favourable weather. This type of off-shore terminal operation differs from the usual concept of all-weather port operations and must be understood in the context of this paper.

The planner of an unloading terminal is much less likely to find adequate berth availability if the berth is unprotected by a breakwater. FIGS 2, 3 & 3a show a typical wave climate such as the authors found at a proposed terminal site in the Mediterranean. If no breakwater is provided, the availability of an unloading terminal would correspond to the wave conditions shown in the last column of TABLE 1. Thus FIG 2 suggests an availability of 65%. However, FIG 2 represents the average of 13 years wave recordings and the authors wish to draw attention to the dangers of basing terminal planning on average statistics.

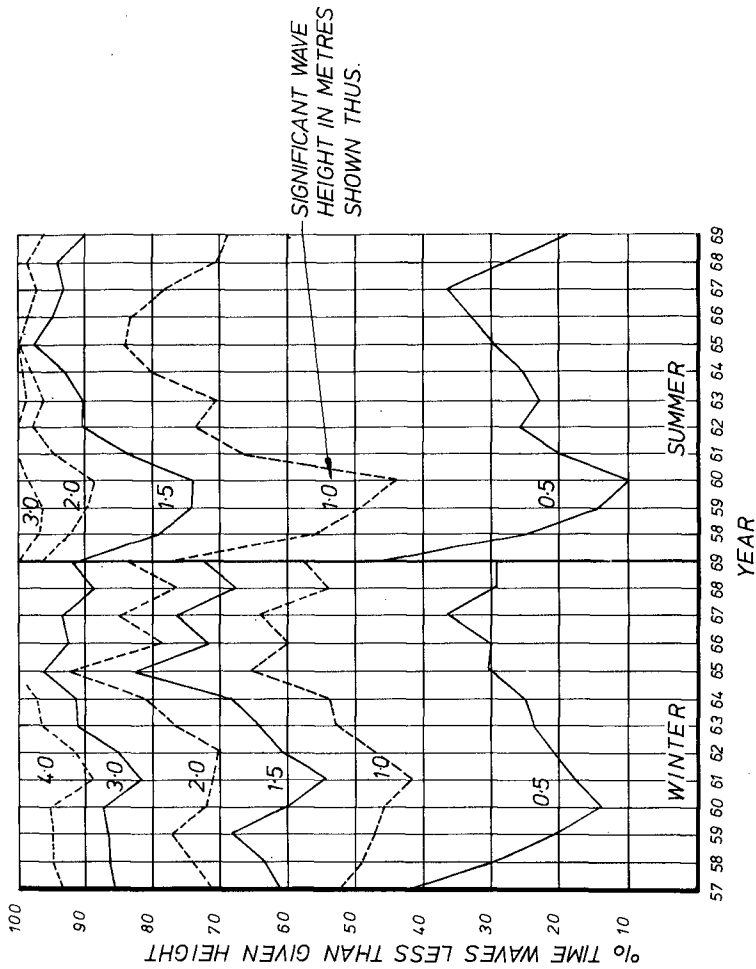


FIG. 3

FIG 3 shows the same figures broken down into winter and summer for each of the 13 years separately. This shows that in a bad winter (such as 1961) availability would be only 42%. FIG 3a shows the 1961 winter figures broken down into wave directions, and again using the criteria of TABLE 1, it can be seen that the availability is reduced to 30%.

In these circumstances, a high annual throughput installation would not be feasible with a single unprotected berth. Even a two-berth installation, whilst providing in theory sufficient unloading time, would be subject to long shut-down periods of both berths simultaneously. Accordingly, the authors believe that a single berth protected by a breakwater is the preferred solution.

The layout shown in FIG 1 is consequently the subject of this paper. It will be seen from FIG 3 that if the breakwater is capable of attenuating 4 metre incident waves to 1 metre at the berth, there will be 90% availability even in the worst recorded winter period. (As stated earlier, the variation of incident wave direction does not significantly affect a breakwater protected terminal).

Such an installation would be operated in the same way as the existing unprotected loading terminals in Australia - i.e. when the sea conditions prevent operations, a ship in berth would be taken off and anchored in deep water to await favourable weather.


DESIGN & CONSTRUCTION CONSIDERATIONS

New style offshore terminals satisfying the aforementioned availability requirements give rise to design and construction problems which necessitate further research.

The proposed offshore terminal differs from traditional concepts in two important ways.

1. The breakwater is not required to provide a safe anchorage on its lee side for 100% of the time, but only when the incident waves are 4 metres high or less. Operation of the terminal is not required when waves greater than 4 metres are allowed to overtop. This concept is termed a "limited availability breakwater".
2. The breakwater is an island structure, and this raises construction problems which have a profound effect on the design concept.

The required island breakwater is in fact connected to the shore by a piled trestle. For operational purposes, this trestle carries one or more conveyor belts and a roadway. Thus it may be argued that this trestle can be built first and used for access by trucks to construct a conventional rubble mound breakwater by end-over-end tipping.

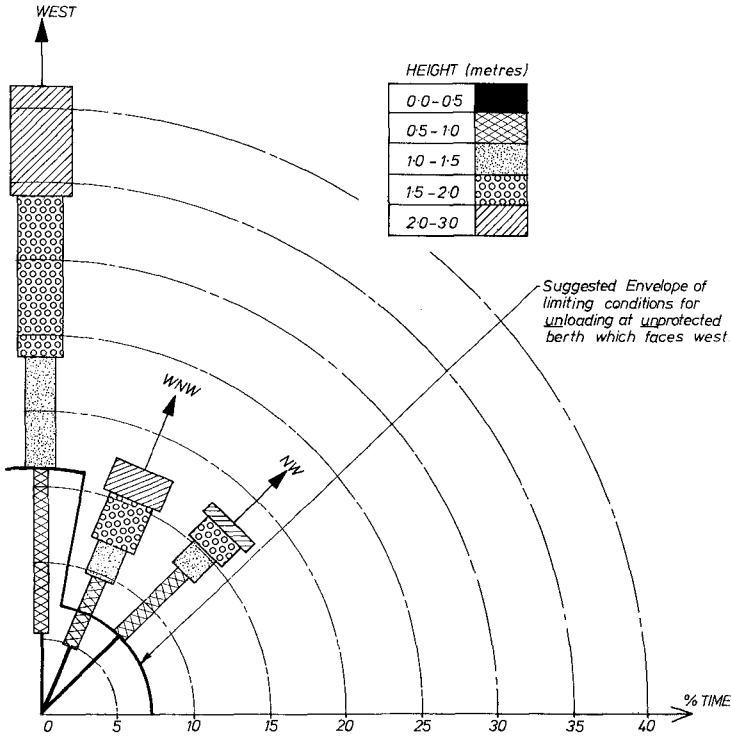

FIGURES SHOW PERCENTAGE OF TOTAL TIME WAVES ARE WITHIN STATED HEIGHT AND DIRECTION RANGE WORST RECORDED WINTER PERIOD.

FIG. 3a

However, in practice this is un-economic for two reasons. Firstly it requires an unacceptably long time to construct the trestle and breakwater sequentially. Secondly the roadway on the trestle would have to be strengthened significantly above the standard required for operation of the berth.

The fundamental economics of construction dictate that the break-water must be constructed as an offshore operation, without use of the trestle for construction access. An offshore operation is defined by the authors as an operation in exposed waters with no access during construction other than by boats or helicopters. This requires the use of floating construction equipment and daily use of barges, tugs and other vessels for the transfer of men and equipment. These activities cannot generally be carried out safely when the waves exceed about 1 metre. Thus it can be seen that in a typical situation such as shown in FIGS 2 and 3, there may be an average of 35% downtime, with a maximum of 58% in a bad winter and a minimum of 16% in a good summer. These figures are not untypical of previous experience in the construction of offshore loading terminals (Ref.1).

Weather down-time in an offshore operation is very costly because it shuts down the entire construction establishment, which after each shut-down requires some time to restart. Furthermore, the wide variability of shut-down time from 16% to 58% makes effective planning of the operation very difficult.

In offshore operations such as construction of the North Sea oil platforms, these problems are so obvious that there is no economic alternative to total onshore pre-fabrication of the structure followed by very rapid offshore installation. The whole purpose of this concept is to reduce the required offshore working time to a minimum by making maximum use of onshore pre-fabrication.

The type of offshore terminal shown in FIG 1 shares the same problems. Instead of being 100km or more from the shore like an oil platform, it is only 2km. Therefore whilst it becomes feasible to adopt "conventional" construction such as would be used for the same structure if it were in sheltered waters, the authors believe that maximum onshore pre-fabrication is economically essential. In the context of a break-water this means caissons. The "conventional" alternative of a rubble mound requires the piecemeal offshore construction of both the break-water and a complete separate berth structure.

A number of eminent authorities have pointed out the disadvantages of caisson breakwaters (Ref. 2). It is the primary purpose of this paper to draw attention to the construction advantages of pre-fabricated caissons for the particular case of a detached bulk unloading terminal, and the consequent necessity to develop design criteria which adequately overcome the various objections to caissons. In the authors' opinion, the disadvantages of caisson breakwaters apply almost entirely to vertical wall fully reflecting structures. Caissons do not need to be fully reflecting or to have vertical walls.

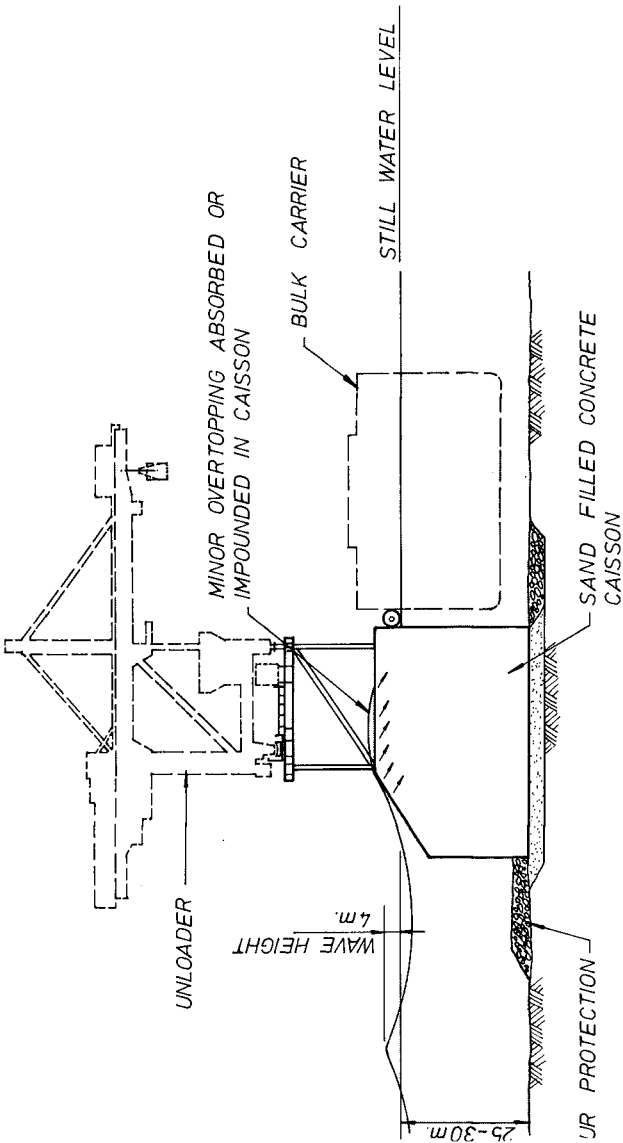


FIG 4 (a)

Previously published work has suggested the concept shown in FIG 5 for the type of terminal shown in FIG 1. The Danish Hydraulic Institute (Ref 5) have recognised the advantages of an overtopping breakwater but suggested that a high reflecting wall, as shown in FIG 5, is necessary in cases where equipment is mounted on the caisson.

However, the maximum design wave load on the caisson depicted in FIG 5 can be shown to be 2 or 3 times that on a sloping face overtopping caisson, and furthermore it suffers all the other disadvantages of vertical wall structures, such as scour at the base.

Accordingly, the authors have developed the concept shown in FIGS 4a & 4b. This meets all the operational availability requirements discussed earlier. Incident waves up to 4 metres high are diffracted round the ends but do not overtop, creating safe conditions for unloading. Waves higher than 4 metres pass over the caissons but under the elevated plant deck. Under these circumstances the berth is shut down and ships taken off to await favourable weather.

The concept is based on the type of breakwater developed by the Danish Hydraulic Institute (Ref 5) but goes a step further by mounting the berth structure on an elevated deck. This retains all the advantages of a sloping face overtopping caisson without endangering the equipment.

The Danish Hydraulic Institute's published work (Ref 5) also draws attention to the fact that much of the advantage of a sloping face breakwater is lost when the tide level falls below the bottom of the sloping section.

The authors consider that from the construction point of view it is not essential to extend the vertical wall up to still water level. Accordingly, it is proposed to include in the research program the concept shown in FIG 6, with the slope extended below low tide level. Such a caisson would require temporary buoyancy tanks to assist flotation and installation. Its potential advantages are further reduction of the maximum wave load on the caisson, and reduced scour.

The paper so far has discussed operational and constructional requirements and demonstrated that these factors combine to create a need for research to establish suitable design criteria for the concept shown in FIGS 4 & 6.

The next part of the paper discusses the requirements of the research program proposed by the authors.

PROPOSED RESEARCH AND DEVELOPMENT

The proposed island breakwater concept (see FIGS 4 & 6) has to meet three principal design criteria:

- (i) its geometry must ensure that the wave climate at the berth behind the breakwater provides the required percentage time availability for unloading, i.e. it must have the specified attenuation factor.

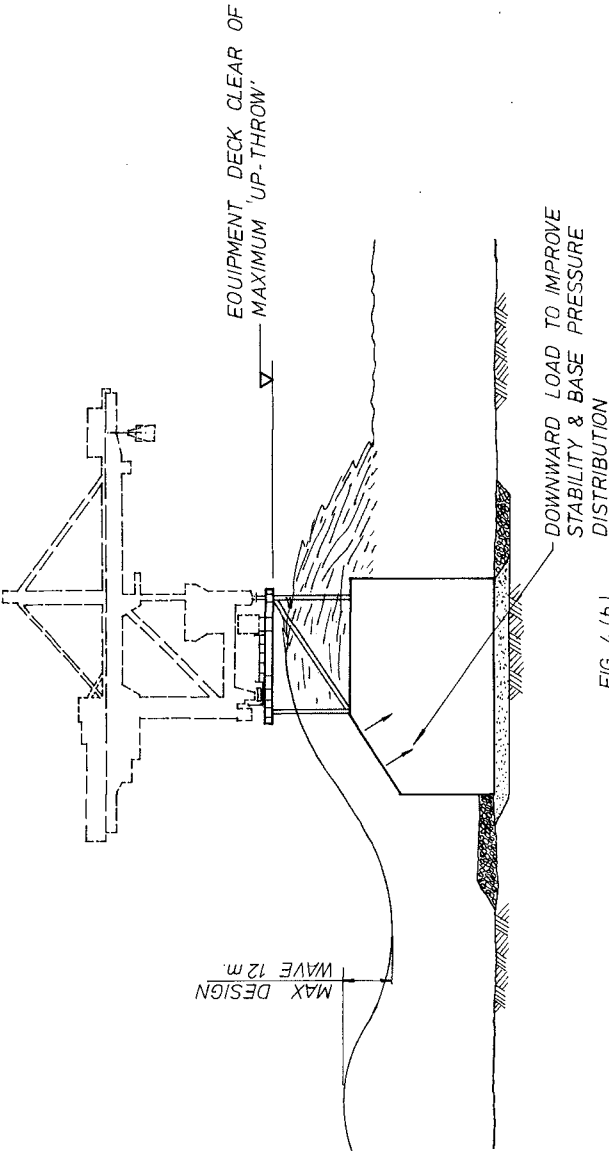


FIG 4 (b)

- (ii) the breakwater must have an adequate factor of safety against a stability failure commensurate with the risk to personnel and unloading equipment.
- (iii) the breakwater geometry should minimise the "up throw" of overtopping waves in order to limit the require deck elevation.

These three criteria require opposing solutions with respect to the breakwater's height and seaward wall geometry, and hence a compromise design must be selected. In general terms a profile which minimises the loads on the structure will also create more overtopping.

Breakwater Stability

The basic requirement of the breakwater stability design comprise:

- (a) provision of the required factors of safety against sliding and overturning of the breakwater when subjected to the maximum design wave.
- (b) prevention of scour at the base such that the foundations are not progressively undermined.

The authors consider that ideally the factor of safety against an overturning failure or base failure, which would have catastrophic consequences for the installation, should be significantly higher than that against sliding. A slide of a few centimetres need not be classed as irreparable damage as it can be rectified by adjustments to the rails carrying the ship unloading equipment. It is of interest to note that most of the documented caisson breakwater failures have in fact involved slides (Ref 3).

Effect of Breakwater Profile with Respect to Stability

If a vertical wall caisson is first considered the wave forces can, as expected, be significantly decreased by allowing the higher waves to overtop instead of totally reflecting them. The graphs in FIG 7 were derived using the MICHE-RUNDGREN theory with the approximations discussed in Refs. 3 & 4. Both the horizontal force and the overturning moment are lower for the overtopping structure. More importantly, the rate of increase of moment with respect to wave height, is significantly reduced. Hence, the overtopping breakwater is considerably less sensitive to an unforeseen increase in the design wave height.

These points are also demonstrated by previous model test results (Ref 5) particularly as the wave conditions approach breaking.

It is possible to further reduce the wave forces and scour erosion of the overtopping breakwater by providing an inclined face to the seaward wall.