



Designation: D5731 – 16

Standard Test Method for Determination of the Point Load Strength Index of Rock and Application to Rock Strength Classifications¹

This standard is issued under the fixed designation D5731; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This test method covers the guidelines, requirements, and procedures for determining the point load strength index of rock. This is an index test and is intended to be used to classify rock strength.

1.2 Specimens in the form of rock cores, blocks, or irregular lumps with a test diameter from 30 to 85 mm can be tested by this test method.

1.3 This test method can be performed in either the field or laboratory. The test is typically used in the field because the testing machine is portable, little or minimal specimen preparation is required, and specimens can be tested within a short time frame of being collected.

1.4 This test method applies to medium strength rock (compressive strength over 15 MPa).

1.5 This test method does not cover which type of specimen should be tested or whether anisotropic factors should be considered. The specifics of the point load test program need to be developed prior to testing and possibly even before sampling. Such specifics would be dependent on the intended use of the data, as well as possible budgetary constraints and possible other factors, which are outside the scope of this test method.

1.6 All observed and calculated values shall conform to the guidelines for significant digits and rounding established in Practice D6026.

1.6.1 The procedures used to specify how data are collected/recorded and calculated in this standard are regarded as the industry standard. In addition, they are representative of the significant digits that generally should be retained. The procedures used do not consider material variation, purpose for obtaining data, special purpose studies, or any considerations for the user's objectives; and it is common practice to increase or reduce significant digits of reported data to commensurate with these considerations. It is beyond the scope of these test

methods to consider significant digits used in analysis methods for engineering design

1.7 The values stated in the SI units are to be regarded as standard.

1.8 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

D653 Terminology Relating to Soil, Rock, and Contained Fluids

D2216 Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D3740 Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction

D5079 Practices for Preserving and Transporting Rock Core Samples

D6026 Practice for Using Significant Digits in Geotechnical Data

D7012 Test Methods for Compressive Strength and Elastic Moduli of Intact Rock Core Specimens under Varying States of Stress and Temperatures

E18 Test Methods for Rockwell Hardness of Metallic Materials

E122 Practice for Calculating Sample Size to Estimate, With Specified Precision, the Average for a Characteristic of a Lot or Process

2.2 ISRM Standard:

Suggested Methods for Determining Point Load Strength³

¹ This test method is under the jurisdiction of ASTM Committee D18 on Soil and Rock and is the direct responsibility of Subcommittee D18.12 on Rock Mechanics.

Current edition approved Dec. 1, 2016. Published January 2017. Originally approved in 1995. Last previous edition approved in 2008 as D5731 – 08. DOI: 10.1520/D5731-16.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ "Suggested Methods for Determining Point Load Strength", International Society for Rock Mechanics Commission on Testing Methods, *Int. J. Rock. Mech. Min. Sci. and Geomechanical Abstr.*, Vol 22, No. 2, 1985, pp. 51–60.

*A Summary of Changes section appears at the end of this standard

3. Terminology

3.1 *Definitions*—For definitions of common technical terms used in this standard refer to Terminology D653.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *diameter, n — D , for point load tests*, the measured dimension of the specimen between the opposing conical test platens when placed in the test machine

3.2.2 *point load strength anisotropy index, n — $I_{a(D)}$* , the strength anisotropy index is defined as the ratio of mean $I_{s(D)}$ values measured perpendicular and parallel to planes of weakness. That is, the ratio of greatest to least point load strength indices on different axes that result in the greatest and least ratio of point load strengths values.

3.2.3 *size-corrected point load strength index, n — $I_{s(D)}$* , the original point load strength index value multiplied by a factor to normalize the value that would have been obtained with diametral test of diameter (D).

3.2.4 *uncorrected point load strength index, n —(I_s)*, an indicator of strength (see 10.1) obtained by subjecting a rock specimen to an increasingly concentrated point load, applied through a pair of truncated, conical platens, until failure occurs.³

4. Summary of Test Method

4.1 This index test is performed by subjecting a rock specimen to an increasingly concentrated load until failure occurs by splitting the specimen. The concentrated load is applied through coaxial, truncated conical platens. The failure load is used to calculate the point load strength index.

4.2 The point load strength index can be used to classify the rocks and provide a preliminary or reconnaissance-level evaluation of spatial variability in rock strength. A common method used is by estimating the uniaxial compressive strength.

5. Significance and Use

5.1 The uniaxial compression test (see Test Method D7012) is used to determine compressive strength of rock specimens. However, it is a time-consuming and expensive test that requires significant specimen preparation and the results may not be available for a long time after the samples are collected. When extensive testing and/or timely information is needed for preliminary and reconnaissance information, alternative tests such as the point load test can be used to reduce the time and cost of compressive strength tests, when used in the field. Such data can be used to make timely and more informed decisions during the exploration phases and more efficient and cost effective selection of samples for more precise and expensive laboratory tests.

5.2 The point load strength test is used as an index test for strength classification of rock materials. The test results should not be used for design or analytical purposes.

5.3 This test method is performed to determine the point load strength index of rock specimens and, if required, the point load strength anisotropy index.

5.4 Rock specimens in the form of either core (the diametral and axial tests), cut blocks (the block test), or irregular lumps

(the irregular lump test) are tested by application of concentrated load through a pair of truncated, conical platens. Little or no specimen preparation is needed and can therefore be tested shortly after being obtained and any influence of moisture condition on the test data minimized. However, the results can be highly influenced by how the specimen is treated from the time it is obtained until the time it is tested. Therefore, it may be necessary to handle specimens in accordance with Practice D5079 and to document moisture conditions in some manner in the data collection.

NOTE 1—The quality of the result produced by this standard is dependent upon the competence of the personnel performing it, and the suitability of the equipment and facilities used. Agencies that meet the criteria of Practice D3740 are generally considered capable of competent and objective testing and sampling. Users of this standard are cautioned that compliance with Practice D3740 does not in itself assure reliable results. Reliable results depend on many factors; Practice D3740 provides a means of evaluating some of those factors.

6. Apparatus

6.1 *General*—A basic point load tester (see Fig. 1) consists of a loading system typically comprised of a loading frame, platens, a measuring system for indicating load, P , (required to break the specimen), and a means for measuring the distance, D , between the two platen contact points at the start of testing and after failure. The equipment shall be resistant to shock and vibration so that the accuracy of readings is not adversely affected by repeated testing. Any special operational, maintenance or calibrations instructions provided by the manufacturer for the particular apparatus being used shall be followed.

6.2 *Loading System:*


6.2.1 The loading system shall have a loading frame with a platen-to-platen clearance that allows testing of rock specimens in the required size range. Typically, this range is between 30 to 100 mm, or the maximum opening size of the load frame, so that an adjustable distance is available to accommodate both small and large specimens.

6.2.2 The loading capacity shall be sufficient to break the largest and strongest specimens to be tested. Point load strength of rock is usually an order of magnitude lower than the compressive strength of rock.

6.2.3 The load frame shall be designed and constructed so that it does not permanently distort during repeated applications of the maximum test load, and so that the platens remain coaxial within ± 0.2 mm throughout testing. No spherical seat or other nonrigid component is permitted in the loading system. Loading system rigidity is advised to avoid slippage when specimens of irregular geometry are tested.

6.2.4 Truncated, conical platens, as shown on Fig. 2, are to be used. The 60° cone and 5-mm radius spherical platen tip shall meet tangentially. The platens shall be of hard material (Rockwell 58 HRC, as explained in Test Method E18) such as tungsten carbide or hardened steel so they remain undamaged during testing.

NOTE 2—It is generally accepted that specimens smaller than 42 mm (BX cores) are not recommended because for smaller diameters the

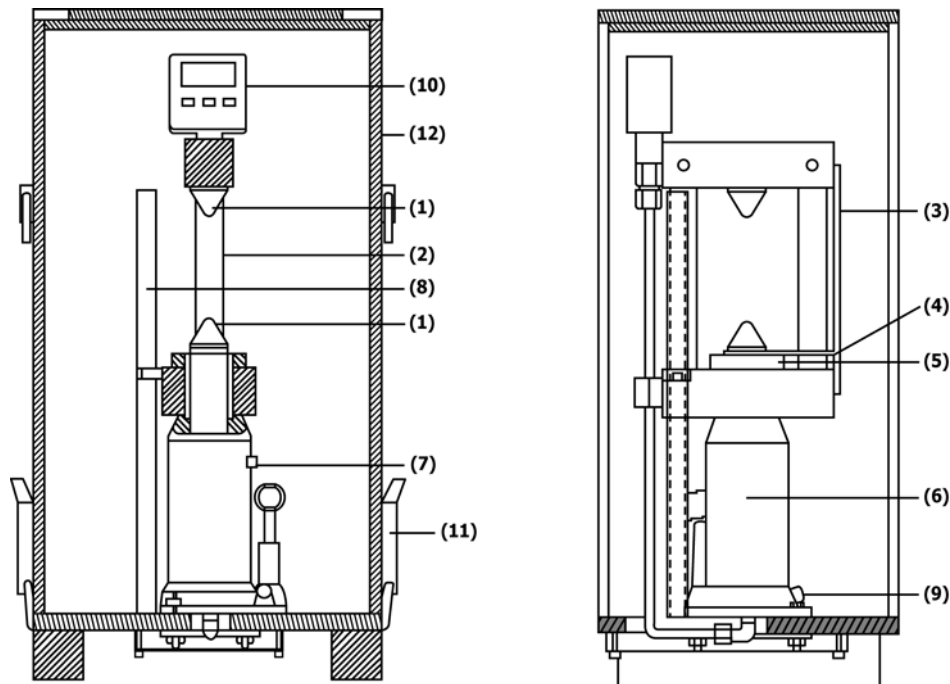

NOTE 1—Load frame general information (Fig. 1):

- (1) Load is applied to the specimens through two standard hardened points
- (2) Two column fixed crosshead frame
- (3) Scale
- (4) Scale pointer
- (5) Bolt
- (6) Hydraulic pump body
- (7) Oil filler cap
- (8) Pump handle for hydraulic piston
- (9) Pressure release valve for hydraulic piston
- (10) Case latched for top cover
- (11) Digital pressure readout
- (12) Point load tester top cover

FIG. 1 Example of a Light-Weight Point Load Test Apparatus

loading points cannot be considered as theoretical “points” in relation to specimen size.⁴

6.3 Load Measuring System:

6.3.1 A load measuring system, for example a load cell or a hydraulic pressure gage, that will indicate failure load, P , required to break specimen.

6.3.2 Measurements of failure load, P , shall be to a precision of $\pm 5\%$ or better of full-scale load-measuring system, irrespective of the size and strength of specimen that is tested.

6.3.3 Failure is often sudden, therefore, and a peak load indicator is needed so the failure load can be recorded after each test.

6.3.4 If required, the system should be capable of using interchangeable, mechanical or electronic gauge, load measuring devices in order to be consistent with the estimated strength of rock and have the desired reading accuracy.

6.4 Distance Measuring System:

⁴ Bieniawski, Z.T., The Point Load Test in Geotechnical Practice, Engineering Geology (9), pages 1-11, 1975.

6.4.1 The distance measuring system, an electronic or vernier direct reading scale, should connect to the loading frame for measuring the distance, D , between specimen-platen contact points at the start of testing and just prior to failure.

6.4.2 Measurements of D shall be to an accuracy of $\pm 2\%$ or better of distance between contact points, irrespective of the size and strength of specimen that is tested.

6.4.3 The measuring system shall allow a check of the “zero displacement” value when the two platens are in contact and should include a zero adjustment and a means to record or measure any penetration of the specimen by the point load platens during testing.

6.4.4 An instrument such as a caliper or a steel rule is needed to measure the width, W , (with an accuracy of $\pm 5\%$) of specimens for all but the diametral test.

6.5 Miscellaneous Items—Depending on the type of samples (core or non-core) and the type of specimens to be tested (diametral, Block, Axial, and alike), the following items may be needed: diamond saw, chisels, towels, marking pens, and plotting paper.