



American Water Works
Association

ANSI/AWWA D110-13 (R18)
(Revision of ANSI/AWWA D110-04)
Reaffirmed without revisions

AWWA Standard

Wire- and Strand-Wound, Circular, Prestressed Concrete Water Tanks

Effective date: Aug. 1, 2018.
First edition approved by AWWA Board of Directors June 22, 1986.
This edition approved Mar. 30, 2018.
Approved by American National Standards Institute May 2, 2018.



This is a preview. [Click here to purchase the full publication.](#)


AWWA Standard

This document is an American Water Works Association (AWWA) standard. It is not a specification. AWWA standards describe minimum requirements and do not contain all of the engineering and administrative information normally contained in specifications. The AWWA standards usually contain options that must be evaluated by the user of the standard. Until each optional feature is specified by the user, the product or service is not fully defined. AWWA publication of a standard does not constitute endorsement of any product or product type, nor does AWWA test, certify, or approve any product. The use of AWWA standards is entirely voluntary. This standard does not supersede or take precedence over or displace any applicable law, regulation, or codes of any governmental authority. AWWA standards are intended to represent a consensus of the water supply industry that the product described will provide satisfactory service. When AWWA revises or withdraws this standard, an official notice of action will be placed on the first page of the Official Notice section of *Journal - American Water Works Association*. The action becomes effective on the first day of the month following the month of *Journal - American Water Works Association* publication of the official notice.

American National Standard

An American National Standard implies a consensus of those substantially concerned with its scope and provisions. An American National Standard is intended as a guide to aid the manufacturer, the consumer, and the general public. The existence of an American National Standard does not in any respect preclude anyone, whether that person has approved the standard or not, from manufacturing, marketing, purchasing, or using products, processes, or procedures not conforming to the standard. American National Standards are subject to periodic review, and users are cautioned to obtain the latest editions. Producers of goods made in conformity with an American National Standard are encouraged to state on their own responsibility in advertising and promotional materials or on tags or labels that the goods are produced in conformity with particular American National Standards.

CAUTION NOTICE: The American National Standards Institute (ANSI) approval date on the front cover of this standard indicates completion of the ANSI approval process. This American National Standard may be revised or withdrawn at any time. ANSI procedures require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of ANSI approval. Purchasers of American National Standards may receive current information on all standards by calling or writing the American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036; (212) 642-4900, or emailing info@ansi.org.

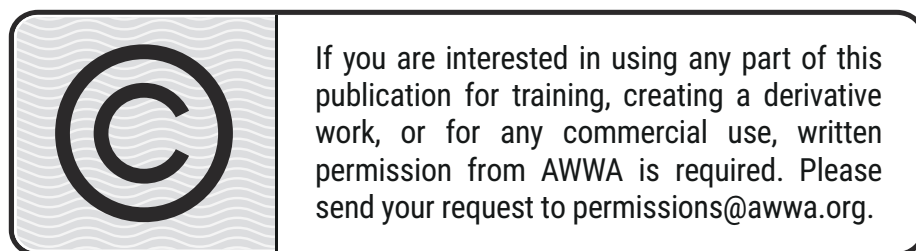

ISBN-13, print: 978-1-62576-303-7

eISBN-13, electronic: 978-1-61300-482-1
DOI: <http://dx.doi.org/10.12999/AWWA.D110.18>

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including scanning, recording, or any information or retrieval system. Reproduction and commercial use of this material is prohibited, except with written permission from the publisher.

Copyright © 2013 by American Water Works Association
Printed in USA

Committee Personnel

The AWWA Standards Committee on Concrete Water Tanks, Wire-Wound Prestressed, which reviewed and approved this standard, had the following personnel for this revision:

Dominic J. Kelly, *Chair*
Andrew Minogue, *Secretary*

User Members

P.H. Bilodeau, Maine Water Company, Saco, Maine
W.J. Horst, Montgomery County Environmental Services, Dayton, Ohio
J.G. Obrist, City of Lincoln, Lincoln, Neb.
M.L. Washington, Tacoma Water, Tacoma, Wash.

General Interest Members

J.W. Birkhoff, Birkhoff, Hendricks & Carter LLP, Dallas, Texas
M.M. Coleman,[†] Standards Council Liaison, Wade Trim Associates Inc., Detroit, Mich.
D.J. Kelly, Simpson Gumpertz & Heger Inc., Waltham, Mass.
F.S. Kurtz,[†] Standards Engineer Liaison, AWWA, Denver, Colo.
M.W. Morin, Hazen and Sawyer, Manchester N.H.
B.J. Phelps, CH2M, Vancouver, Wash.
W.B. Powers, Brown and Caldwell, Andover, Mass.
L.G. Soohoo, Stantec, Walnut Creek, Calif.
J.B. Walfish, James B. Walfish Structural Engineer, Honolulu, Hawaii
S. Wong, Kleinfelder, San Diego, Calif.
M.S. Zarghamee,^{*} Simpson Gumpertz & Heger Inc., Waltham, Mass.

Producer Members

T.W. Bloomer,^{*} DN Tanks, El Cajon, Calif.
W. Cooksey,^{*} Preload, Louisville, Ky.
S.M. Crawford, Crom LLC, Gainesville, Fla.
T.B. Mincey,^{*} Crom LLC, Chattanooga, Tenn.

A. Minogue, DN Tanks, Grand Prairie, Texas

R.G. Moore, Precon Corporation, Newberry, Fla.

A.E. Tripp Jr., Preload, Hauppauge, N.Y.

M.J. Vineyard,* Precon Corporation, Newberry, Fla.

*Alternate

† Liaison, nonvoting

Contents

All AWWA standards follow the general format indicated subsequently. Some variations from this format may be found in a particular standard.

SEC.	PAGE	SEC.	PAGE
Foreword			
I	Introduction.....	vii	
I.A	Background.....	vii	
I.B	History.....	vii	
I.C	Acceptance.....	viii	
II	Special Issues.....	ix	
II.A	Intent.....	ix	
II.B	Limitations.....	ix	
III	Use of This Standard.....	ix	
III.A	Industry Practice and Assumptions ...	x	
III.B	Purchaser Options and Alternatives.....	xi	
III.C	Modification to Standard.....	xii	
IV	Major Revisions.....	xii	
V	Comments.....	xiv	
Standard			
1 General			
1.1	Scope.....	1	
1.2	Definitions.....	2	
1.3	References.....	4	
2 Materials			
2.1	Materials.....	8	
2.2	Concrete and Shotcrete.....	8	
2.3	Mixing Water.....	9	
2.4	Admixtures.....	9	
2.5	Reinforcement.....	10	
2.6	Elastomeric Materials.....	12	
2.7	Duct Material.....	13	
2.8	Concrete and Shotcrete Coatings.....	13	
2.9	Sealants and Joint Fillers.....	13	
2.10	Epoxy Bonding Agent.....	15	
2.11	Epoxy Mortar and Grout.....	15	
2.12	Form Coatings.....	15	
3 Design			
3.1	Notation.....	15	
3.2	Design Method.....	16	
3.3	Design Loads.....	17	
3.4	Allowable Stresses.....	19	
3.5	Wall Design.....	22	
3.6	Dome-Roof Design.....	25	
3.7	Other Roof Designs.....	30	
3.8	Floor Design.....	30	
3.9	Footing Design.....	33	
3.10	Columns.....	34	
3.11	Tank Appurtenances.....	34	
4 Provisions for Earthquake-Induced Forces			
4.1	Introduction.....	38	
4.2	Seismic Joint Types.....	43	
4.3	Seismic Design Loads.....	44	
4.4	Vertical and Horizontal Forces.....	54	
4.5	Other Effects.....	55	
4.6	Maximum Allowable Stresses and Reinforcement Requirements	57	
4.7	Maximum Allowable Coefficient of Friction.....	58	
4.8	Additional Requirements.....	59	

SEC.	PAGE	SEC.	PAGE
4.9	Foundation Design.....	59	
4.10	Minimum Freeboard.....	60	
4.11	Design for Seismic Effects of Backfill.....	61	
5	Construction Procedures		
5.1	Scope	61	
5.2	Concrete.....	61	
5.3	Shotcrete	66	
5.4	Forming	71	
5.5	Nonprestressed-Steel Reinforcement and Vertical Tendons.....	72	
5.6	Prestressing	72	
5.7	Wall Tolerances.....	76	
5.8	Restraint Cables	76	
5.9	Waterstops.....	76	
5.10	Elastomeric Bearing Pads	76	
5.11	Sponge Fillers	77	
5.12	Watertightness.....	77	
5.13	Repairs.....	78	
5.14	Tank Backfill.....	79	
5.15	Cleanup	80	
5.16	Electrical Grounding.....	80	
5.17	Lightning Protection	80	
6	Inspection Procedures		
6.1	Scope	80	
6.2	Field Observation During Construction	80	
6.3	Inspection After Structure Is Constructed	83	
6.4	Routine Inspections	84	
6.5	Safety	87	
		Appendix	
		Alternative Method of Analysis Based on UBC 1997.....	89
		Figures	
		1 Example Diaphragm Sheet	10
		2 Joints Between Wall and Dome Edge Ring.....	26
		3 Typical Floor-Slab Construction Joint	31
		4 Types of Joints Used Between the Wall and Its Foundation	44
		5 Curve for Obtaining Factor C_w for the Ratio r/H	47
		6 Curve for Obtaining Factor K_p for the Ratio r/H	49
		7 Curves for Obtaining Factor W_I/W_T and W_C/W_T for the Ratio r/H	50
		8 Curves for Obtaining Factor X_I/H and X_C/H for the Ratio r/H	51
		9 Net Effective Base-Pad Width After Deformation.....	58
		10 Diaphragm Patching Detail for Type IV Tank Core Wall.....	72
		A.1 Adjusted UBC 1997 Design Response Spectrum	90
		Tables	
		1 Allowable Stresses in Concrete and Shotcrete	19
		1M Metric Conversion.....	20
		2 Importance Factor.....	40
		3 Structural Response Coefficient for Type of Tank.....	41
		4 Soil Site Class Definitions	47

Foreword

This foreword is for information only and is not a part of ANSI/AWWA D110.

I. Introduction.

I.A. *Background.* The New England Water Works Association (NEWWA) established a committee in 1958 to prepare a standard specification for the design and construction of prestressed concrete water-storage tanks. The committee submitted a suggested specification to NEWWA in October 1962 as a guide to those in the water industry who wished to consider the use of these tanks.

American Concrete Institute (ACI) Committee 344 concluded eight years of committee work with a report titled “Design and Construction of Circular Prestressed Concrete Structures,” published in the *ACI Journal* September 1970. This report referred primarily to wire-wound tanks.

I.B. *History.* In the December 1972 issue of *Journal AWWA*, the applicability of the ACI report to water containment structures was discussed in four articles. As a result of these articles and continued discussion on the subject, a standards committee was authorized by the American Water Works Association (AWWA) to develop an AWWA standard for circular, prestressed concrete water tanks.

An AWWA standards committee on circular, prestressed concrete water tanks was appointed and held its first meeting June 19, 1974. During its first two years, the committee studied the various types of prestressed tanks then in service or under construction and determined that most were of the wire-wound type. Therefore, the committee in 1976 was directed to limit its scope to the wire- and strand-wound prestressed tank wall design. The first edition of this standard incorporated the work of ACI Committee 344 and contained additional requirements and recommendations, specifically for potable and process water, and for wastewater containment structures. The new standard, ANSI/AWWA D110-86, Standard for Wire-Wound Circular Prestressed-Concrete Water Tanks, was approved by the AWWA Board of Directors on June 22, 1986, and had an effective date of June 1, 1987. The standard has been in use since approval by the American National Standards Institute (ANSI) on Mar. 3, 1987.

The first revision of this standard was initiated by the AWWA Standards Committee during 1990 according to AWWA Standards Council policy. The revised standard ANSI/AWWA D110-95 was approved on June 22, 1995, by the AWWA Board of

* American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

Directors. The next edition of the standard, ANSI/AWWA D110-04, was approved by the AWWA Board of Directors on Jan. 18, 2004. This edition, ANSI/AWWA D110-13, was approved by the AWWA Board of Directors on Jan. 20, 2013.

I.C. *Acceptance.* In May 1985, the US Environmental Protection Agency (USEPA) entered into a cooperative agreement with a consortium led by NSF International (NSF) to develop voluntary third-party consensus standards and a certification program for direct and indirect drinking water additives. Other members of the original consortium included the Water Research Foundation (formerly AwwaRF) and the Conference of State Health and Environmental Managers (COSHEM). The American Water Works Association (AWWA) and the Association of State Drinking Water Administrators (ASDWA) joined later.

In the United States, authority to regulate products for use in, or in contact with, drinking water rests with individual states.* Local agencies may choose to impose requirements more stringent than those required by the state. To evaluate the health effects of products and drinking water additives from such products, state and local agencies may use various references, including

1. An advisory program formerly administered by USEPA, Office of Drinking Water, discontinued on Apr. 7, 1990.
2. Specific policies of the state or local agency.
3. Two standards developed under the direction of NSF, NSF[†]/ANSI[‡] 60, Drinking Water Treatment Chemicals—Health Effects, and NSF/ANSI 61, Drinking Water System Components—Health Effects.
4. Other references, including AWWA standards, *Food Chemicals Codex*, *Water Chemicals Codex*,[§] and other standards considered appropriate by the state or local agency.

Various certification organizations may be involved in certifying products in accordance with NSF/ANSI 61. Individual states or local agencies have authority to accept or accredit certification organizations within their jurisdiction. Accreditation of certification organizations may vary from jurisdiction to jurisdiction.

Annex A, “Toxicology Review and Evaluation Procedures,” to NSF/ANSI 61 does not stipulate a maximum allowable level (MAL) of a contaminant for substances not

* Persons outside the United States should contact the appropriate authority having jurisdiction.

† NSF International, 789 N. Dixboro Road, Ann Arbor, MI 48105.

‡ American National Standards Institute, 25 West 43rd Street, Fourth Floor, New York, NY 10036.

§ Both publications available from National Academy of Sciences, 500 Fifth Street, NW, Washington, DC 20418.

regulated by a USEPA final maximum contaminant level (MCL). The MALs of an unspecified list of “unregulated contaminants” are based on toxicity testing guidelines (noncarcinogens) and risk characterization methodology (carcinogens). Use of Annex A procedures may not always be identical, depending on the certifier.

ANSI/AWWA D110 does not address additives requirements. Users of this standard should consult the appropriate state or local agency having jurisdiction in order to

1. Determine additives requirements, including applicable standards.
2. Determine the status of certifications by parties offering to certify products for contact with, or treatment of, drinking water.
3. Determine current information on product certification.

II. Special Issues.

II.A. Intent. This standard reflects a committee consensus of industry practice concerning the design, detailing, and construction of circular, prestressed concrete water tanks of several types, with or without vertical prestressing of the tank core wall. The horizontal prestressed reinforcement of the tank wall is accomplished by the application of helically wound high-tensile-stress wire or strand under controlled tension on the surface of the core wall, protected by shotcrete cover coats.

Recommended criteria and guidelines are presented to assist engineers in the design, construction, and inspection of tanks with shotcrete, cast-in-place concrete, or precast circular concrete core walls, with or without internal steel diaphragms, based on the successful application of these concepts in practice and the detailed experience of committee members. Engineering principles are tied to existing codes where applicable.

The intent is also to assist the designer and constructor by sharing information on the unique aspects in analysis and construction that are encountered in these types of structures.

II.B. Limitations. Because of the wide range of site-specific environments, foundation conditions, loadings, and construction conditions throughout North America, this standard should not be expected to apply universally nor to produce a cost-effective and completely maintenance-free structure in every situation. In adapting this standard to obtain the structure’s expected service life for the actual conditions that are anticipated, the purchaser and the designer of the tank are advised to carefully study all factors affecting the structure during its anticipated service life.

III. Use of This Standard. It is the responsibility of the user of an AWWA standard to determine that the products described in that standard are suitable for use in the particular application being considered.

III.A. *Industry Practice and Assumptions.* It is not the purpose of this standard to either define or recommend contractual relationships or to stipulate contractual obligations, both of which are the responsibility of the purchaser. Generally, purchasers may solicit competitive bids for wire- and strand-wound circular prestressed concrete tanks by one of two methods.

According to the first method, a design professional is retained by the purchaser to prepare construction drawings, specifications, and other contract documents. Competitive bids are then solicited from constructors and suppliers for construction of the tank. In this standard, these are referred to as purchaser-furnished designs.

According to the second method, the purchaser prepares performance specifications that require bidding constructors to prepare project designs and specifications and to construct the tank according to the design. In this standard, these are referred to as design–construct projects.

While the division of information that must be covered in the purchaser’s specifications for execution of each method of contracting differs substantially, depending on who is responsible for the tank design, the information that must be supplied by the purchaser to successfully apply this standard is essentially the same.

ANSI/AWWA D110 does not address matters related to site selection and property acquisition. It is assumed that the purchaser will have conducted sufficient background work in the form of water system studies, predesign surveys, subsurface investigations, preliminary design work, etc., to establish the desired tank site, volume, operating water depth, and elevations. Further, it is assumed that the purchaser will have acquired the property, easements, and rights-of-way necessary for construction of the facility, including site access, the tank structure, and associated water pipelines connecting the tank to the water system and drainage, if required. Specifically, it has been assumed that the purchaser will arrange for or provide the following as necessary or appropriate:

1. The site on which the tank is to be built, with adequate space to permit the constructor to erect the structure using customary methods.
2. A predesign site survey and preparation of a site plan showing existing topography, property lines, approximate tank centerline location, setback, encumbrances, details of special construction features, and extent of final site grading.
3. A site geotechnical survey and foundation report, including logs of borings and test pits, soil densities, and other pertinent soil and geological information; construction criteria for any backfill that may be necessary at a particular site; and foundation design criteria prepared by a registered design professional specializing in